



## DAG1000-4S VoIP Analog Access Gateway


**DAG1000-4S** analog gateway are versatile IP-based voice and fax gateway. For small business, the family office, remote office and branch business provide a low cost, simple operation VoIP solutions. Connected analog phone, fax, PBX with standard voice interface and provide quality voice service. DAG1000-4S VoIP access gateway use standard SIP protocol and compatible with Leading IMS/NGN platform, IPPBX and SIP servers.

### Product Pictures



### Key Benefits

- Support SIP/IMS/3GPP
- Primary/Backup SIP Servers
- Flexible Routing and Manipulation
- Support Modem/POS
- Elastix/Broadsoft Certification
- Support IPv4 and IPv6
- Data/ Voice/ Management VLAN
- Build-in Firewall and Access Rules
- SNMP/TR069/Provision
- Cloud-based Management System and Bandwidth Optimization



# Decade Focused Creates the High-quality Goods

## Physical Interfaces

- Phone Interface: 4FXS, RJ-11
- Ethernet Interface:  
2\* RJ-45 10/100Mbps, RJ-45

## Voice & Fax

- G.711A/U, G.723, G.729, G.726
- Comfort Noise Generation(CNG)
- Voice Activity Detection(VAD)
- Automatic Gain Control(AGC)
- Echo Cancellation(G.168)
- Adaptive (Dynamic) Jitter Buffer
- Hook Flash
- Programmable Gain Control
- T.38/Pass-through, up to 14.4kbps
- Modem/POS
- DTMF mode:  
Signal/RFC2833/INBAND

## FXS Port

- Connector: RJ11
- Dial Mode: DTMF and Pulse
- Pulse: 10 and 20 PPS
- Caller ID: DTMF/FSK
- Max Cable Length: 1KM
- Reversed Polarity

## Protocol

- SIP V2.0 (RFC 3261,3262,3264)
- IMS/3GPP
- SDP (RFC 2327)
- REFER (RFC 3515)
- RTP/RTCP (RFC 1889,1890)
- STUN (RFC 3489)
- ARP/RARP (RFC 826/903)
- SNTP (RFC 2030)
- DHCP/PPPoE
- TFTP/HTTP
- VLAN 802.1P/802.1Q
- V.152

## Supplement Service

- Call Waiting
- Blind Transfer
- Attend Transfer
- Call Pickup
- Call Forward on Busy
- Call Forward on No Reply
- Unconditional Call Forward
- Hotline
- Call Hold
- DND
- 3-way conference
- Voicemail



Customer first

Services more intimately

#### Call & Route

- Port Group
- IP Trunk
- Primary and Secondary SIP Account
- 8 Inbound/Outbound Routing
- Number Manipulation
- Digitmap

#### Network Features

- NAT (Rout and Bridge)
- Static IP, PPPoE, DHCP Client
- DHCP Server
- DNS Proxy
- DMZ, Static routing
- Built-in Firewall
- Static/dynamic ARP
- QoS, Traffic Shaping
- Voice/Data/Management Vlan

#### Environment

- Power Supply: 100-240V, 50-60Hz  
Output: 12VDC, 1A
- Power Consumption: 6W(long line 8W)
- Temperature(Operation): 0 °C ~ 45 °C  
(Storage): -20 °C ~80 °C
- Humidity: 10%-90% No condensation

#### Maintain & Upgrade

- SNMP/TR069
- Auto Provisioning
- Web/Telnet
- Configuration Backup/Restore
- Firmware Upgrade via WEB/TFTP
- Syslog and CDR
- Access Rule List
- Network Capture
- Outward Test(GR909)
- Automatic Time Synchronization
- IVR local Maintenance
- Cloud-based Management

#### Homologation

- CE, FCC
- Elastix / Broadsoft

#### Dimension & Weight

- 140(L)×86(W)×25(H)mm 0.2kg


#### Packing Content

- Gateway
- Power adapter
- Network cable
- User's Manual CD



Trust Growth Cooperation Sharing

## System Application

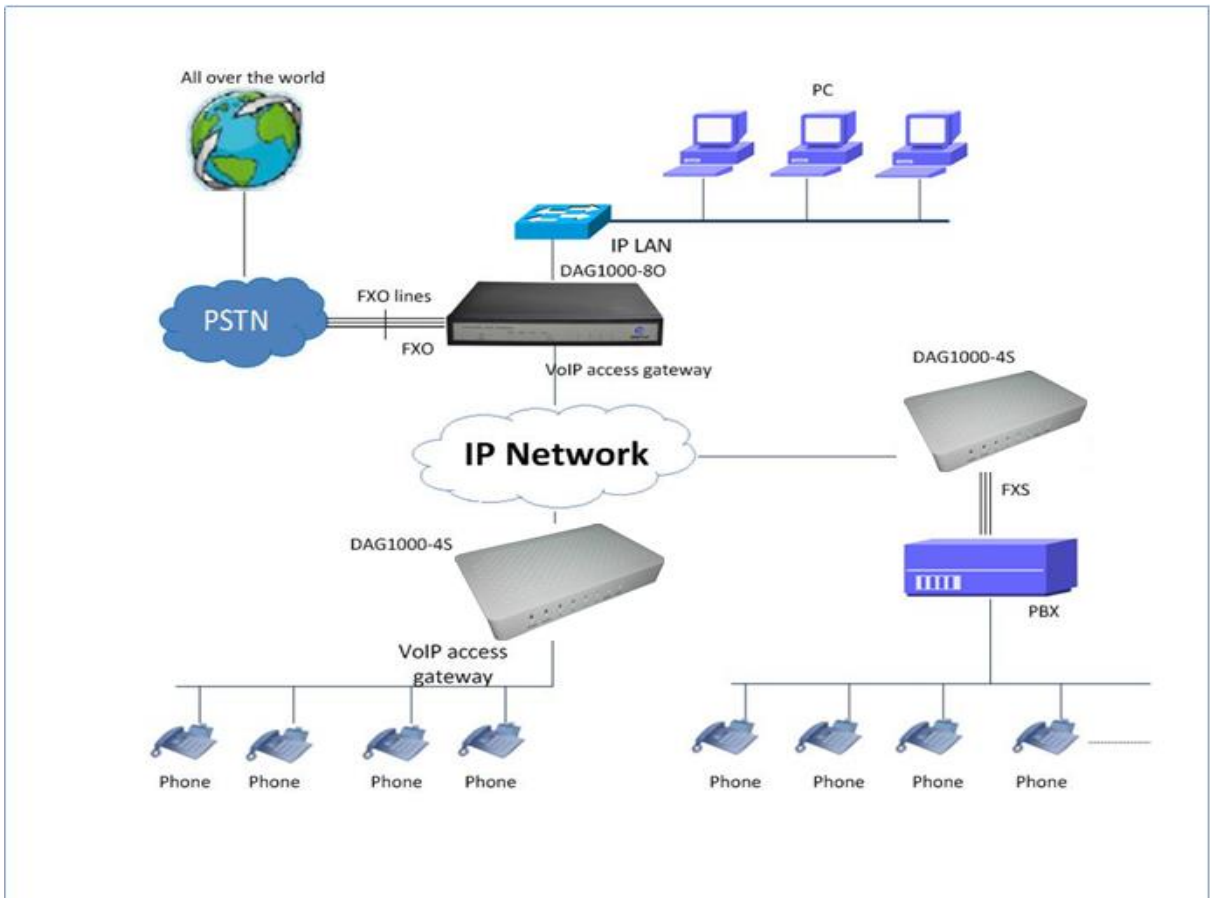

Dinstar Technologies Co., Ltd.

Floor 9, Guoxing Building, Changxing Road, Nanshan District, Shenzhen, China 518052

Tel: +86 755 2645 6664 Fax: +86 755 2645 6659

Email: [sales@dinstar.com](mailto:sales@dinstar.com) [support@dinstar.com](mailto:support@dinstar.com) Website: [www.dinstar.com](http://www.dinstar.com)

*The Gateway to VoIP World*